



Shoulder pads machine supplier in taiwan

**TYPE DM-021SP2**

## **PAD STEAM FUSING MACHINE**

### 1>CHARACTER OF MACHINE

IT CAN LOAD TWO SETS OF MOLD, EACH MOLD WITH ONE CAVITY IT CAN HAVE SEVERAL LAYERS OF POWDER COATED FELT STICKED TOGETHER AND FOAM A FUSING PAD

### 2>CAPACITY

PER MOLD PER CYCLE CAN PROUDCE ONE PIECE OF PAD WITH 12 SECONDS

### 3>ATTAVHMENT

ONE SET OF VACCUM DEVICE TO SUCK MOISTURE FROM THE PAD AFTER PAD FUSING

### 4>HEATER

3 KWS X 2 = 6 KWS

### 5>FUSING PAD MATERIALS

POWDER COATED NEEDLE PUNCH POLYESTER FELT



### 6>MACHINE SIZE AND WEIGHT

SIZE 1300 X 800 X 2180 MM (LXWXH)

WEIGHT ABOUT 800 KGS

### 7>REMARKS

THIS MACHINE IS ABLE TO LOAD SEMI RAGLAN MOLD OR PILLOW TYPE OF FUSING PAD MOLD FOR REGULAR PAD MAKINGA

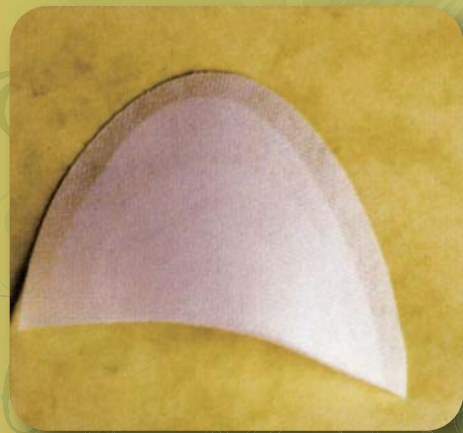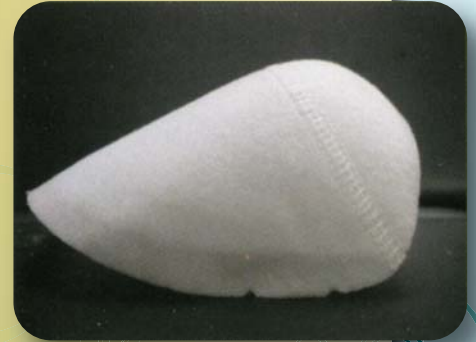

WE WELCOME YOUR INQUIRY

NEW PADS INDUSTRY CO., LTD.

6F, NO. 16, SECTION 1, SHING SHENG SOUTH ROAD, TAIPEI, TAIWAN

TEL : 886-2-23949410

WEB : [www.newpads.com.tw](http://www.newpads.com.tw)

FAX : 886-2-23910004

E-MAIL : [dm.npi@msa.hinet.net](mailto:dm.npi@msa.hinet.net)

